


# AVENTOS HS

## Narrow aluminum hardware pack


### Package contents

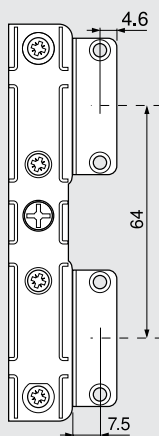

2 x 20S4200A  
Narrow alum.  
mounting plate



POZI #2x2 driver bit  
for adjusting tension



18 x 699.110  
Aluminum door  
screws for  
mounting plates

Only 8 screws required for installation

Hardware set

Part no.

**20S4200AA1**

## Also required (sold separately)



Lift mechanism set

Set includes:

- 2 x Lift mechanisms
- 2 x Cover plates (right and left)
- 2 x Cover caps
- 2 x Arm assembly (right and left)
- 2 x Stabilizer rod cover caps
- 2 x Stabilizer rod adapters
- 10 x #7x35mm (1-3/8") wood screws



Stabilizer rod

Cut to length  
Length =  
Interior cabinet opening - 120 mm

# Assembly




## WARNING

Risk of injury from spring-loaded arm

- Do not push arm assembly down or leave in the down position
- Remove arm assembly from mechanism before installing or removing cabinet

### 1 Locating pin locations and other dimensions

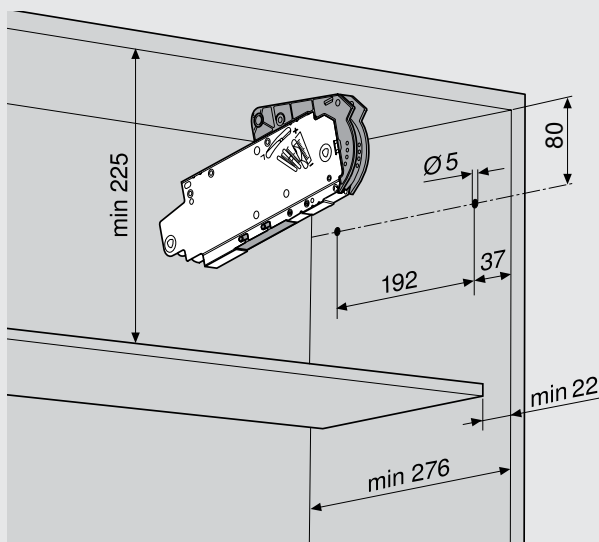

Part no.

AVENTOS boring template is available for preboring 5mm locating pins

**65.5020**

### 2 Attaching the lift mechanism

After aligning the lift mechanism into the cabinet using the locator pins, attach the mechanism with the five mounting screws provided.

5 x wood screws  $\varnothing 7 \times 35$  mm (1-3/8")

